

Metal Reducer




金属减径环 Metal Reducer

- ◆ 产品材质: 以优质黄铜电镀制成
- ◆ 产品用途: 此产品可将不同的螺纹外径尺寸进行自由转换; 可根据客户要求定制, 生产不同螺纹长度及其他不同螺纹之间的转换。
- ◆ 产品形状: 六角形或圆形

- ◆ Material: Brass with nickel plated
- ◆ Ambient temperature: -40°C ~ 100°C, temporary: to 120°C
- ◆ Characteristics: Change larger thread to smaller thread.
- ◆ Application: A reducer is used if the dimensions of existing tapped holes are too large for a given gland. It provides a means of connection between cable entry devices and equipment having dissimilar threads.
- ◆ Accessories: Locknut, Sealing Washer

规格参数

单位Unit : mm

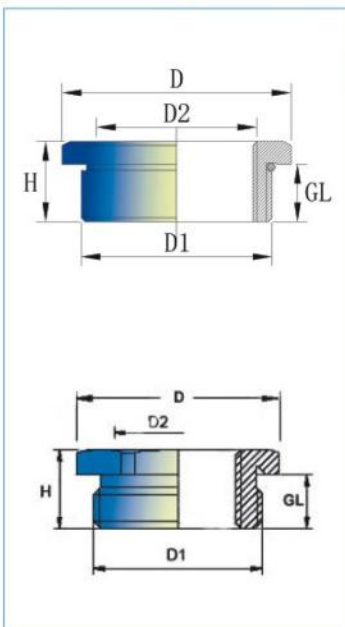

六角系列 Hexagon	圆形系列 Circle	外螺纹(D1) Outer Thread	内螺纹(D2) Inner Thread	螺纹长度(GL) Thread Length	高度(H) Height	扳手径(D) Spanner Size
REM16/12H	REM16/12C	M16x1.5	M12x1.5	6	9	18
REM20/16H	REM20/16C	M20x1.5	M16x1.5	6.5	9.5	22
REM25/20H	REM25/20C	M25x1.5	M20x1.5	7.5	10.5	30
REM32/25H	REM32/25C	M32x1.5	M25x1.5	8	11.5	39
REM40/32H	REM40/32C	M40x1.5	M32x1.5	9	12.5	43
REM50/40H	REM50/40C	M50x1.5	M40x1.5	10	14	57
REM63/50H	REM63/50C	M63x1.5	M50x1.5	10	14	65
REPG9/7H	REPG9/7C	PG9	PG7	6	9	18
REPG11/9H	REPG11/9C	PG11	PG9	6.5	9.5	20
REPG13.5/11H	REPG13.5/11C	PG13.5	PG11	6.5	9.5	22
REPG16/13.5H	REPG16/13.5C	PG16	PG13.5	6.5	9.5	24
REPG21/16H	REPG21/16C	PG21	PG16	7.5	10.5	30
REPG29/21H	REPG29/21C	PG29	PG21	8	11.5	39
REPG36/29H	REPG36/29C	PG36	PG29	9	12.5	50
REPG42/G36H	REPG42/G36C	PG42	PG36	10	14	57
REPG48/42H	REPG48/42C	PG48	PG42	10	14	64
RE3/4-1/2BH	RE3/4-1/2C	G3/4"	G1/2"	7.5	10.5	30
RE1-3/4H	RE1-3/4C	G1"	G3/4"	7.5	10.5	40
RE1-1/4-1H	RE1-1/4-1C	G1-1/4"	G1"	8	11.5	50