


Metal cable gland M type 金属固定电缆防水接头 M 型

赛出品质，创新未来



金属固定电缆防水接头 M 型 Metal cable gland M type

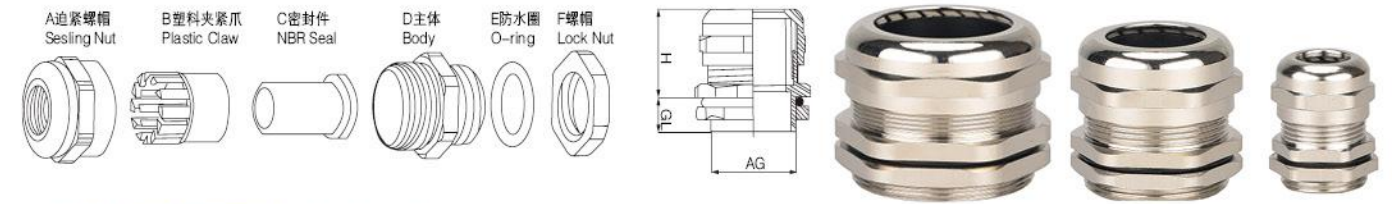

公制螺纹 M 型系列 Metric thread type

- 螺纹规格：公制牙 Metric，德制牙 PG，管制牙 G，美制牙 NPT。
- 产品材质：金属部件采用黄铜镀锌制成，夹紧件采用尼龙塑料 (PA) 制成，密封件和 O 型密封圈均采用丁腈橡胶 (NBR) 制成。
- 所获专利：实用新型专利，专利编号为 ZL201020530888.7。
- 防护等级：在规定的卡口范围内，并使用 O 型密封圈旋紧，达到 IP68-10 巴压力。
- 工作温度：静态：-40℃到 100℃，短时间达 120℃。动态：-20℃到 80℃，短时间达 100℃。
- 产品特性：特殊夹紧爪与夹紧圈凸扣之设计，配合紧头装配省时便利，夹紧电缆范围大、抗拉力强、可防水、防尘、抗盐、耐酸碱、酒精、油脂及一般溶剂。
- 使用方法：金属电缆防水接头是电缆的配套产品，接头可将电缆锁紧，另一端可接入设备箱体上，也可以根据选用螺纹接入进出口为内螺纹的电动设备上。
- Thread type : Metric , PG , G , NPT. ● Material : Brass, nickel plated.
- Claw : PA. ● Sealing and sealing ring : NBR.
- Patent : National Utility Model Patent , Patent no. is ZL 201020530888.7.
- Protection degree : IP68. ● Temperature Resistance : -40℃ to 100℃ , short time to 120℃ .
- Function : Extremely easy installation, simply insert cable through the assembled gland and tighten gland locknut until cable is secured. These cable glands are designed to withstand water, dust salt acid-base, alcohol, oil and common solvent.

产品型号 Model	螺纹规格 Thread specification	适用范围 Range (mm)	螺纹外径 Thread O .D .(mm)	螺纹长度 Thread LengthGL (mm)	接合长度 Joint length H (mm)	扳手尺寸 Spanner Size (mm)
SC-M8	M8 × 1	2-5	8	5	16	12
SC-M10	M10 × 1	3-6.5	10	6.5	19	14
SC-M12	M12 × 1.5	3-6.5	12	6.5	19	14
SC-M12-8		4-8	12	8	19	17
SC-M14	M14 × 1.5	4-8	14	8	19	17
SC-M16	M16 × 1.5	4-8	16	8	20	18
SC-M16-10		5-10	16	8	21	20
SC-M18	M18 × 1.5	5-10	18	8	21	20
SC-M18-12		6-12	18	8	22	22
SC-M20	M20 × 1.5	6-12	20	8	22	22
SC-M22-14		10-14	22	8	23	24
SC-M22	M22 × 1.5	10-14	22	8	23	24
SC-M24	M24 × 1.5	10-14	24	9	25	24/27
SC-M25-14		10-14	25	9	25	24/27
SC-M25-16	M25 × 1.5	12-16	25	9	27	27
SC-M25-18		13-18	25	9	27	30/27
SC-M27	M27 × 1.5	13-18	27	9	27	30
SC-M28	M28 × 1.5	13-18	28	9	27	30
SC-M30	M30 × 1.5	13-18	30	9	29	30/32
SC-M32	M32 × 1.5	15-22	32	10	29	35
SC-M32-25		18-25	32	10	31	40
SC-M33	M33 × 1.5	15-22	33	10	29	35
SC-M36	M36 × 1.5	18-25	36	10	31	40
SC-M37	M37 × 1.5	18-25	37	10	31	40
SC-M40-25	M40 × 1.5	18-25	40	11	31	40/45
SC-M40-30		22-30	40	11	35	45
SC-M42	M42 × 1.5	22-30	42	11	35	45
SC-M47	M47 × 1.5	25-33	47	11	37	50
SC-M48	M48 × 1.5	25-33	48	11	37	50/52
SC-M50	M50 × 1.5	32-38	50	13	37	57/55
SC-M54	M54 × 1.5	32-38	54	13	38	57
SC-M60	M60 × 1.5	37-44	60	14	38	64
SC-M63	M63 × 1.5	37-44	63	14	38	64/68
SC-M64	M64 × 2	37-44	64	14	38	64/68
SC-M72	M72 × 2	42-52	72	16	42	78
SC-M72-58		48-58	72	16	42	78
SC-M75	M75 × 2	42-52	75	16	42	78/80
SC-M80	M80 × 2	55-62	80	18	45	88
SC-M88	M88 × 2	65-70	88	18	45	94
SC-M100	M100 × 2	78-84	100	20	53	110

注：特殊规格需要请联系工厂
Note : Special size and type please contact us.