


Plastic waterproof cable gland PG/M-B (Standard type)
塑料固定电缆防水接头 PG/M-B 型 (一体式)

赛出品质，创新未来



塑料固定电缆防水接头 PG/M-B 型 (一体式)
Plastic waterproof cable gland PG/M-B (Standard type)

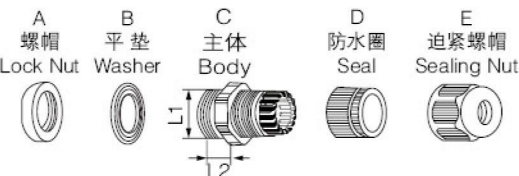

- 产品材质：A.C.E 部位采用 UL 认可的尼龙 PA66，B.D 部位采用丁腈橡胶。
- 螺纹规格：公制 (Metric)，德制 (PG)，英制 (G)，英制 (NPT)。
- 工作温度：静态 -40℃至 100℃，瞬时耐热至 120℃，动态 -20℃至 80℃，瞬间耐热至 100℃。
- 产品特性：特殊的夹紧爪与橡胶件设计，夹紧电缆范围大，抗拉力特强，可防水，防尘，防盐，耐酸碱，酒精，油脂及一般溶剂。
- 颜色种类：黑色 (RAL9005)、浅灰 (RAL7035)、银色 (RAL7001)，特殊颜色可定做。
- Material：Parts A.C.E are made of UL approved nylon PA66，parts B and D are made of nitrile butadiene rubber (NBR)。
- Thread spec：Metric，PG，G，NPT。
- Working temperature：-40℃ to 100℃ in static state，instantaneous heat resistance up to 120℃，-20℃ to 80℃ in dynamic state，instantaneous heat resistance up to 100℃。
- Characteristics：Special design of clamping die and rubber part，large range in clamping cable，ultra-strong stretching resistance，waterproof dustproof and high ability to resist salt，acid，alkali，alcohol，grease and general solvent。
- Color：Black(RAL9005)、light grey (RAL7035)、silver(RAL7001) as well as special colors that can be designed at request。

产品型号 Model	螺纹规格 Thread Size	适用电缆 Cable Range (mm)	螺纹外径 Thread O.D. L1 (mm)	螺纹长度 Thread Length L2 (mm)	扳手直径 Spanner Size A & E (mm)	数量 / 袋 Qty/bag
PG7B	PG7	4 ~ 6.8	12.5	8	17/15	100
PG7B	PG7	3 ~ 5.5	12.5	8	17/15	100
PG9B	PG9	5 ~ 8	15.2	9	22/19	100
PG9B	PG9	3 ~ 5.5	15.2	9	22/19	100
PG11B	PG11	5 ~ 10	18.6	9	24/22	100
PG11B	PG11	4 ~ 7	18.6	9	24/22	100
PG13.5B	PG13.5	7 ~ 12.5	20.4	10	27/24	100
PG13.5B	PG13.5	5 ~ 9	20.4	10	27/24	100
PG16B	PG16	8.5 ~ 14	22.5	10	30/27	100
PG16B	PG16	7 ~ 11	22.5	10	30/27	100
PG21B	PG21	14 ~ 18	28.3	12	36/33	100
PG21B	PG21	12 ~ 16	28.3	12	36/33	100
PG29B	PG29	18 ~ 25	37	15	46/42	50
PG29B	PG29	16 ~ 22	37	15	46/42	50
PG36B	PG36	24 ~ 32	47	15	57/52	20
PG36B	PG36	21 ~ 26	47	15	57/52	20
PG42B	PG42	31 ~ 41	54	16	64/62	20
PG42B	PG42	26 ~ 32	54	16	64/62	20
PG48B	PG48	35 ~ 45	59.3	16	70/65	20
PG48B	PG48	30 ~ 38	59.3	16	70/65	20

产品型号 Model	螺纹规格 Thread Size	适用电缆 Cable Range (mm)	螺纹外径 Thread O.D. L2 (mm)	螺纹长度 Thread Length L1 (mm)	扳手直径 Spanner Size A & E (mm)	数量 / 袋 Qty/bag
M12B	M12 × 1.5	4 ~ 6.8	12	8	17/15	100
M12B	M12 × 1.5	3 ~ 5.5	12	8	17/15	100
M16B	M16 × 1.5	4.5 ~ 8	16	9	22/19	100
M16B	M16 × 1.5	3 ~ 5.5	16	9	22/19	100
M18B	M18 × 1.5	6 ~ 10	18	9	24/22	100
M18B	M18 × 1.5	4 ~ 7	18	9	24/22	100
M20B	M20 × 1.5	7 ~ 12.5	20	10	27/24	100
M20B	M20 × 1.5	5 ~ 9	20	10	27/24	100
M22B	M22 × 1.5	8.5 ~ 14	22	10	30/27	100
M22B	M22 × 1.5	7 ~ 11	22	10	30/27	100
M28B	M28 × 1.5	14 ~ 18	28	12	36/33	100
M28B	M28 × 1.5	12 ~ 16	28	12	36/33	100
M36B	M36 × 1.5	18 ~ 25	36	15	46/42	50
M36B	M36 × 1.5	16 ~ 22	36	15	46/42	20
M46B	M46 × 1.5	24 ~ 32	46	15	57/52	20
M46B	M46 × 1.5	21 ~ 26	46	15	57/52	20
M50B	M50 × 1.5	31 ~ 41	50	16	64/62	20
M50B	M50 × 1.5	26 ~ 32	50	16	64/62	20
M58B	M58 × 1.5	35 ~ 45	58	16	70/65	20
M58B	M58 × 1.5	30 ~ 38	58	16	70/65	20