

Plastic waterproof cable gland SC-M type

塑料固定电缆防水接头 SC-M 型


赛出品质，创新未来



塑料固定电缆防水接头 SC-M 型

Plastic waterproof cable gland SC-M type

公制螺纹
Metric thread

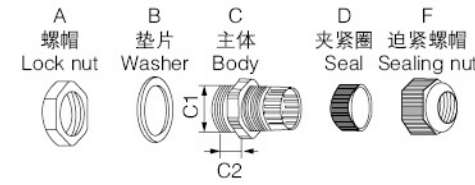

- 产品材质：UL 认可的尼龙 PA66，丁腈橡胶。
- 螺纹规格：公制 (Metric)，德制 (PG)，英制 (G)，美制 (NPT)。
- 工作温度：静态 -40℃至 100℃，瞬时耐热至 120℃，动态 -20℃至 80℃，瞬时耐热至 100℃。
- 产品特性：特殊的夹紧爪与橡胶件设计，夹紧范围大，抗拉力特强，可防水，防尘，防盐，耐酸碱，酒精，油脂及一般溶剂。
- 颜色种类：黑色，灰色，特殊颜色（白色、红色、蓝色、深灰色）可定做。
- Material: UL approved nylon PA66, Nitrilebutadienerubber(NBR).
- Thread specification: Metric, PG, G, NPT.
- Working temperature: -40 to 100°C in static state, instantaneous heat resistance up to 120°C, -20°C to 80°C in dynamic state, instantaneous heat resistance up to 100°C.
- Characteristics: Special design of clamping die and rubber part, large range in clamping cable, ultra-strong stretching resistance, waterproof, dustproof, and high ability to resist salt, acid, alkali, alcohol, grease and general solvent.
- Color: Black, grey as special colors(white, red, blue, darkgrey) that can be designed at request.

产品型号 Model	螺纹尺寸 Thread size (mm)	开孔尺寸 size of hole (mm)	螺纹长度 Length of thread (mm)	壁厚 Wall thickness (mm)	适用电缆 Applicable to cable (mm)	扳手尺寸 Wrench size (mm)	包装数量 PCS
SC-M12	M12×1.5	Φ12.2-12.5	9	3	3 ~ 6.5	18/16	100
SC-M12	M12×1.5	Φ12.2-12.5	9	3	2 ~ 5	18/16	100
SC-M16	M16×1.5	Φ16.2-16.5	9	3	4 ~ 8	22/19	100
SC-M16	M16×1.5	Φ16.2-10.5	9	3	2 ~ 6	22/19	100
SC-M18	M18×1.5	Φ18.2-18.5	9	3	5 ~ 10	24/22	100
SC-M18	M18×1.5	Φ18.2-18.5	9	3	3 ~ 7	24/22	100
SC-M20	M20×1.5	Φ20.2-20.5	9	5	6 ~ 12	27/24	100
SC-M20	M20×1.5	Φ20.2-20.5	9	4	5 ~ 9	27/24	100
SC-M22	M22×1.5	Φ22.2-22.5	10	5	10 ~ 14	30/27	100
SC-M22	M22×1.5	Φ22.2-22.5	10	5	6 ~ 12	30/27	100
SC-M24	M24×1.5	Φ24.2-24.5	10	5	12 ~ 15	33/28	100
SC-M24	M24×1.5	Φ24.2-24.5	10	5	10 ~ 12	33/28	100
SC-M25	M25×1.5	Φ25.2-25.5	10	5	13 ~ 15	33/28	100
SC-M25	M25×1.5	Φ25.2-25.5	10	5	8 ~ 12	33/28	100
SC-M25	M25×1.5	Φ25.2-25.5	12	5	13 ~ 18	33/30	100
SC-M25	M25×1.5	Φ25.2-25.5	12	5	9 ~ 16	33/33	100
SC-M27	M27×1.5	Φ27.2-27.5	12	5	13 ~ 18	35/33	100
SC-M27	M27×1.5	Φ27.2-27.5	12	6	9 ~ 16	35/33	100
SC-M30	M30×1.5	Φ30.2-30.5	12	6	16 ~ 22	37/37	100
SC-M30	M30×1.5	Φ30.2-30.5	12	6	16 ~ 20	37/37	100
SC-M32	M32×1.5	Φ32.2-32.5	12	6	16 ~ 21	39/35	100
SC-M32	M32×1.5	Φ32.2-32.5	12	6	13 ~ 18	39/35	100
SC-M36	M36×1.5	Φ36.2-37	12	6	18 ~ 25	45/42	50
SC-M36	M36×1.5	Φ36.2-37	12	7	13 ~ 20	45/42	50
SC-M40	M40×1.5	Φ40.2-41	17	7	20 ~ 26	52/52	20
SC-M40	M40×1.5	Φ40.2-41	17	7	22 ~ 32	52/52	20
SC-M50	M50×1.5	Φ50.5-51	19	10	32 ~ 38	60/60	20
SC-M50	M50×1.5	Φ50.5-51	19	10	25 ~ 36	60/60	20
SC-M63	M63×1.5	Φ63.5-64	19	10	37 ~ 44	74/69	10
SC-M63	M63×1.5	Φ63.5-64	19	10	29 ~ 35	74/69	10
SC-M70	M72×1.5	Φ72.5-73	27	15	42 ~ 52	83/77	5
SC-M70	M72×1.5	Φ72.5-73	27	15	32 ~ 40	83/77	5