

Plastic waterproof cable gland PG-L (Long thread)


塑料固定电缆防水接头 PG-L 型 (加长型)

赛出品质, 创新未来



塑料固定电缆防水接头 PG-L (加长型)

Plastic waterproof cable gland PG-L (Long thread)

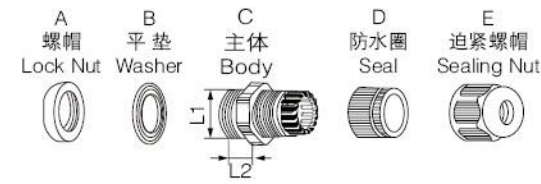

- 产品材质: A.C.E 部位采用 UL 认可的尼龙 PA66, B.D 部位采用丁腈橡胶。
- 螺纹规格: 公制 (Metric), 德制 (PG), 英制 (G), 英制 (NPT)。
- 工作温度: 静态 -40℃至 100℃, 瞬时耐热至 120℃, 动态 -20℃至 80℃, 瞬间耐热至 100℃。
- 产品特性: 特殊的夹紧爪与橡胶件设计, 夹紧电缆范围大, 抗拉力特强, 可防水, 防尘, 防盐, 耐酸碱, 酒精, 油脂及一般溶剂。
- 颜色种类: 黑色 (RAL9005)、浅灰 (RAL7035)、银色 (RAL7001), 特殊颜色可定做。
- Material: Parts A.C.E are made of UL approved nylon PA66, parts B and D are made of nitrile butadiene rubber (NBR).
- Thread spec: Metric, PG, G, NPT.
- Working temperature: -40℃ to 100℃ in static state, instantaneous heat resistance up to 120℃, -20℃ to 80℃ in dynamic state, instantaneous heat resistance up to 100℃.
- Characteristics: Special design of clamping die and rubber part, large range in clamping cable, ultra-strong stretching resistance, waterproof dustproof, and high ability to resist salt, acid, alkali, alcohol, grease and general solvent.
- Color: Black (RAL9005), light grey (RAL7035), silver (RAL7001) as well as special colors that can be designed at request.

产品型号 Model	螺纹规格 Thread Size	适用电缆 Cable Range (mm)	螺纹外径 Thread O.D. L2 (mm)	螺纹长度 Thread Length L1 (mm)	扳手直径 Spanner Size A & E (mm)	数量 / 袋 Qty/bag
PG7-L	PG7	3 ~ 6.5	12.5	15	18/16	100
PG7-L	PG7	2 ~ 5	12.5	15	18/16	100
PG9-L	PG9	4 ~ 8	15.2	15	22/19	100
PG9-L	PG9	2 ~ 6	15.2	15	22/19	100
PG11-L	PG11	5 ~ 10	18.6	15	24/22	100
PG11-L	PG11	3 ~ 7	18.6	15	24/22	100
PG13.5-L	PG13.5	6 ~ 11	20.4	15	27/24	100
PG13.5-L	PG13.5	5 ~ 9	20.4	15	27/24	100
PG16-L	PG16	10 ~ 13	22.5	15	30/27	100
PG16-L	PG16	7 ~ 12	22.5	15	30/27	100
PG19-L	PG19	12 ~ 15	24	15	30/28	100
PG19-L	PG19	10 ~ 12	24	15	30/28	100
PG21-L	PG21	13 ~ 18	28.3	15	35/33	100
PG21-L	PG21	9 ~ 16	28.3	15	35/33	100
PG25-L	PG25	16 ~ 21	30	15	37/35	50
PG25-L	PG25	13 ~ 18	30	15	37/35	50
PG29-L	PG29	18 ~ 25	37	15	45/42	50
PG29-L	PG29	13 ~ 20	37	15	45/42	50
PG36-L	PG36	22 ~ 32	47	15	58/52	20
PG36-L	PG36	20 ~ 26	47	18	58/52	20
PG42-L	PG42	32 ~ 38	54	20	62/58	20
PG42-L	PG42	25 ~ 31	54	20	62/58	20
PG48-L	PG48	37 ~ 44	59.3	20	70/64	20
PG48-L	PG48	29 ~ 35	59.3	20	70/64	20