


90°波纹管快速接头
Right Angle Quick Connector for Flexible Pipes

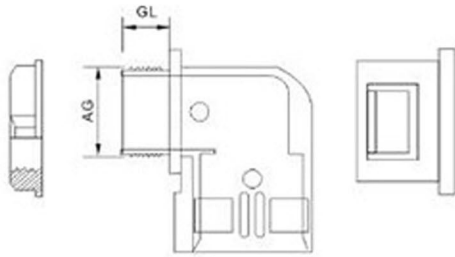

螺牙规格：公制牙、PG牙、G（PF）、NPT牙

产品材质：采用UL认可的尼龙PA66(防火等级UL94V-2)制成。

工作温度：静态-40°C-100°C，短时可至120°C；动态-20°C-80°C，短时可至100°C。

产品特性：特殊的夹紧爪设计，夹紧浪管抗拉力强，超快速插拔装卸，提高安装效率。

颜色种类：黑色、灰色。其它颜色可定做。

Thread: Metric, PG, G(PF), NPT

Materials: UL approved Nylon PA66 (Flammability UL94V-2)

Working temperature: -40°C-100°C in static state, or instantaneous heat resistance up to 120°C; -20°C-80°C in dynamic state, or instantaneous heat resistance up to 100°C.

Features: The excellent design of claws, connect the flexible pipes quickly and safely.

Colors: Black, gray, and other colors available upon request.

适配软管 Accommodated Pipes	编号 Item No.	螺牙规格 Thread	螺纹外径 Thread O.D. C1(mm)	螺纹长度 Thread Length C2(mm)	包装 Std.Pkg (pcs)
AD10.0	YSC-MG12-10	M12X1.5	12	8.5	
AD13.0	YSC-MG16-13	M16X1.5	16	10	
	YSC-MG18-13	M18X1.5	16	10	
	YSC-MG20-13	M20X1.5	20	10	
AD15.8	YSC-MG16-15.8	M16X1.5	16	10	
	YSC-MG18-15.8	M18X1.5	18	12.5	
	YSC-MG20-15.8	M20X1.5	20	12.5	
AD18.5	YSC-MG20-18.5	M20X1.5	20	12.5	
AD21.2	YSC-MG20-21.2	M20X1.5	20	13	
	YSC-MG24-21.2	M24X1.5	24	13	
	YSC-MG25-21.2	M25X1.5	25	13	
AD25.0	YSC-MG25-25	M25X1.5	25	13	
AD28.5	YSC-MG25-28.5	M25X1.5	25	13	
	YSC-MG27-28.5	M27X1.5	27	13	

90°波纹管快速接头
Right Angle Quick Connector for Flexible Pipes



适配软管 Accommodated Pipes	编号 Item No.	螺牙规格 Thread	螺纹外径 Thread O.D. C1(mm)	螺纹长度 Thread Length C2(mm)	包装 Std.Pkg (pcs)
AD28.5	SC-MG30-28.5	M30X1.5	30	13	
	SC-MG32-28.5	M32X1.5	32	13	
AD34.5	SC-MG32-34.5	M32X1.5	32	14	
	SC-MG36-34.5	M36X1.5	36	14	
	SC-MG40-34.5	M40X1.5	40	14	
AD42.5	SC-MG40-42.5	M40X1.5	40	15	
	SC-MG48-42.5	M48X1.5	48	15	
AD54.5	SC-MG50-54.5	M50X1.5	50	16	
	SC-MG63-54.5	M63X1.5	63	16	
AD10	SC-PG7-10	PG7	12.4	8.5	
AD13	SC-PG9-13	PG9	15.2	10	
AD15.8	SC-PG11-15.8	PG11	18.4	12.5	
AD18.5	SC-PG13.5-18.5	PG13.5	20.4	12.5	
AD21.2	SC-PG16-21.2	PG16	22.5	13	
AD25	SC-PG21-25	PG21	28.3	13	
AD28.5	SC-PG21-28.5	PG21	28.3	13	
AD34.5	SC-PG29-34.5	PG29	37	14	
AD42.5	SC-PG36-42.5	PG36	47	15	
AD54.5	SC-PG42-54.5	PG42	54	16	
	SC-PG48-54.5	PG48	59.3	16	
AD10	SC-G1/4-10	G1/4"	13.1	8.5	
AD13	SC-G3/8-13	G3/8"	16.6	10	
AD15.8	SC-G1/2-15.8	G1/2"	20.9	12.5	
AD18.5	SC-G1/2-18.5	G1/2"	20.9	12.5	
AD21.2	SC-G1/2-21.2	G1/2"	20.9	13	
AD25	SC-G3/4-25	G3/4"	26.4	13	
AD28.5	SC-G3/4-28.5	G3/4"	26.4	13	
AD34.5	SC-G1-34.5	G1"	33.2	14	
AD42.5	SC-G1 1/4-42.5	G1 1/4"	41.9	15	
AD54.5	SC-G1 1/2-54.5	G1 1/2"	48	16	
	SC-G2-54.5	G2"	60	16	